

Hydrodynamic Performance of a Very Large Floating Structure with Oscillating Water Columns: Semi-analytical Investigation

Jiachun Zhou¹, Xuanlie Zhao¹, Jun Zang², Jing Geng¹ and Qingwen Kuang³

Received: 10 May 2022 / Accepted: 19 October 2022

© Harbin Engineering University and Springer-Verlag GmbH Germany, part of Springer Nature 2023

Abstract

Responses of the very large floating Structures (VLFS) can be mitigated by implementing oscillating water columns (OWCs). This paper explores the fundamental mechanism of present wave interactions with both structures and examines the hydrodynamic performance of VLFS equipped with OWCs (VLFS-OWCs). Under the linear potential flow theory framework, the semi-analytical model of wave interaction with VLFS-OWCs is developed using the eigenfunction matching method. The semi-analytical model is verified using the Haskind relationship and wave energy conservation law. Results show that the system with dual-chamber OWCs has a wider frequency bandwidth in wave power extraction and hydroelastic response mitigation of VLFS. It is worth noting that the presence of Bragg resonance can be triggered due to wave interaction with the chamber walls and the VLFS, which is not beneficial for the wave power extraction performance and the protection of VLFS.

Keywords Semi-analytical investigation; Very large floating structures; Oscillating water column; Bragg resonance; Hydroelastic response

1 Introduction

Very large floating structures (VLFS) are of great significance from a point of view of exploiting/utilizing ocean space or resources, e.g., the floating airport (Suzuki et al., 2006) and offshore aquaculture engineering (Buck et al., 2018; Chu et al., 2020). Various structures have been pat-

ented and investigated widely. Compared with the conventional coastal and offshore foundation (e. g., land-based breakwaters), VLFS possesses some advantages of being mobile, easy to expand and shrink and not affected by sea-level rise (Wang and Wang, 2015).

Unlike the problems of wave interaction with a rigid body, the hydroelasticity of the VLFS shall need to be considered. Greenhill (1886) and Wadhams (1973) pioneered the investigation of wave interaction with elastic bodies. They pointed out that the deformation of the plate shall not be neglected. In addition, the different forms of dispersion relations would appear when waves propagate under elastic plates. Based on Liu et al. (1994) and Wadhams (1973), Li et al. (1999) simplified the dispersion equation of waves in ice-covered waters of infinite length and calculated the deformation of waves after it was introduced into ice-covered waters by using the energy flux method. Evans and Davies (1968) firstly used the Wiener-Hopf method to solve the mixed boundary problem of wave-ice interaction. Fox and Squire (1990) determined the reflection and transmission coefficients by expanding the eigenfunction of the velocity potential and introducing a minimum error function. Kim and Ertekin (1998) replaced the non-orthogonal eigenfunction under the ice layer of Fox and Squire

Article Highlights

- A semi-analytical model is developed for wave interaction of very large floating structures (VLFS) with oscillating water columns (OWCs);
- The response of VLFS is effectively mitigated by implementing OWCs;
- The Bragg reflection dominates the influence of the OWCs on the response of VLFS at certain frequencies.

✉ Xuanlie Zhao
xlzhao@hrbeu.edu.cn

¹ College of Shipbuilding Engineering, Harbin Engineering University, Harbin 150001, China

² Department of Architecture and Civil Engineering, University of Bath, Bath, BA2 7AY, United Kingdom

³ PowerChina ZhongNan Engineering Corporation Limited, Changsha 410000, China

(1990) with orthogonal eigenfunction satisfying dispersion relations, effectively improving the calculation efficiency. Sahoo et al. (2001) introduced a new eigenfunction with orthogonality and extended the solution under simply supported and built-in edge conditions. Teng et al. (2001) optimized the method of Sahoo et al. (2001) to make the coefficient matrices diagonal. Hence, the solution of the associated linear system is particularly simple (Xu and Lu, 2009). Squire (1995, 2007) gave a detailed introduction to the development of wave-ice interaction, especially in mathematical modeling. Recently, numerical models are proposed to calculate the hydroelasticity of the VLFS. Zhang et al. (2019) calculated the kinematic response of a small ice floe and the flexural motion of a sea ice floe under wave action by Smoothed Particle Hydrodynamics (SPH) method. Cheng et al. (2022) optimized the design and layout of an integrated system of modular WEC-type floating breakwaters and a pontoon-type VLFS by the method of hybrid finite element (FE) - boundary element (BE).

The development of marine clean energy can alleviate energy demand and protect the environment. Among various wave energy devices, OWC wave energy converter is considered to be the most successful because of its simple structure and high reliability (Ning et al., 2019). Through theoretical analysis, numerical simulation, and physical experiments, scholars have conducted comprehensive study on the OWC with single-chamber (He et al., 2019; Simonetti and Cappietti, 2021), dual-chamber (Gang et al., 2022; Rezanejad et al., 2021) and multi-chamber (Doyle and Aggidis, 2019; Zheng et al., 2020) in the opening water. Falcão and Henriques (2016), Shalby et al. (2019), and other scholars also reviewed OWC. Compared with single-chamber OWC, the dual-chamber and multi-chamber OWC have larger energy capture width ratio and effective energy extraction bandwidth. Although the energy capture width ratio of OWC has improved, its high construction cost is a problem for commercial applications. Integrated application of wave energy devices and marine structures is an effective solution to reduce construction costs (Zhao et al., 2021; Zhao et al., 2022; John Ashlin et al., 2018). The successful cases of the Mutriku Wave Power Plant (Torre-Enciso et al., 2009) and REWEC3 breakwater (Arena et al., 2013) also confirm the feasibility of integrating OWC devices with marine structures.

From the reliability of VLFS, the motion response is vital. Hence, many scholars proposed the mitigation scheme, such as bottom-mounted breakwaters (Wang et al., 2010), horizontal and vertical plates (Ohta, 1999; Watanabe et al., 2003), submerged horizontal or inclined plates (Mohapatra and Guedes Soares, 2019; Cheng et al., 2016), wave energy converters, etc. As for wave energy converters, Maeda et al. (2000; 2001) first proposed integrating OWC with VLFS. Hong et al. (2006) investigated the hydroelastic re-

sponses of VLFS placed behind a reverse T-shape freely floating breakwater with a built-in OWC, it has been shown numerically that the structural deflections of the VLFS can be reduced significantly by a suitably designed reverse T-shape floating breakwater. During the same period, various VLFS-OWC integration schemes were proposed (Crema et al., 2015; Ikoma et al., 2002; Ikoma et al., 2012; Ikoma et al., 2015; Ikoma et al., 2020; Young and Kyoung, 2007). Hong et al. (2007) and Kyoung et al. (2008) illustrated that the energy capture of OWC and the motion response of VLFS are a pair of opposite changes, and the Power Take-Off (PTO) is the key parameter (Wu et al., 2022), which was also found by Ikoma et al. (2018). Hong et al. (2006) studied the influence of OWC independently operated at the weather side of VLFS on the hydrodynamic response of VLFS. In addition, Hong and Hong (2007) considered the articulated connection mode between OWC and VLFS on this basis, to reduce the anchoring cost. OWC in a non-embedded integrated system operates independently and mitigates the response of VLFS through wave energy conversion.

The effect of an OWC device on the VLFS has been investigated by Maeda (2000; 2001) and Hong et al. (2006; 2007). But the interaction of the VLFS and OWC is not revealed fundamentally in terms of the hydrodynamic coefficient and excitation volume flux. Nevertheless, that illustration is helpful in understanding the combination of VLFS and OWC.

The structure of this paper is as follows: In section 2, the semi-analytical solution method of VLFS-OWCs and the definition of hydrodynamic parameters are given. In section 3, the semi-analytical model program is verified by Haskind relationship and energy conservation. In section 4, the effects of integration parameters on hydrodynamic parameters are discussed. Finally, the conclusions are given in section 5.

2 Analytical solutions

2.1 Mathematical formulation

The sketch of dual-chamber VLFS-OWCs system is shown in Figure 1. A global Cartesian coordinate system $O-xz$ is adopted with Oz being vertically upward and Ox being horizontally rightwards. The VLFS is considered to be a semi-infinite elastic plate that extends to the positive x -direction. A dual-chamber OWCs was arranged at the weather side of VLFS in the water of finite depth h . Symbolically, h_1 , h_2 , h_3 denote the draft of the front-wall, mid-wall, rear-wall, the corresponding thickness is a_1 , a_2 , and a_3 , respectively. d_1 , d_2 , d_3 represent the breadths of chamber 1, chamber 2, and spacing between the two structures.

Under the potential flow theory framework, the fluid

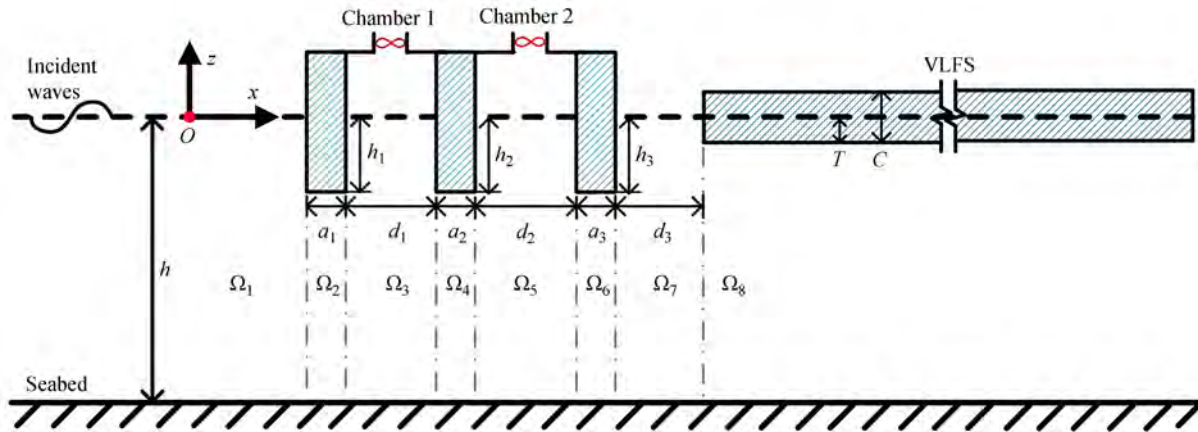


Figure 1 The sketch of dual-chamber VLFS-OWCs system

flow is described by the complex velocity potential of $\Phi(x, y, z, t) = \text{Re}[\phi(x, y, z)e^{-i\omega t}]$, where $\text{Re}[\]$ denotes the real part of the variable; ϕ , i , ω , t , represent the space velocity potential, the imaginary unit, the circular frequency of incident waves, and the time. ϕ can be decomposed as the sum of scattering and radiation potentials, i.e.,

$$\phi = \phi_1 + \phi_2 \quad (1)$$

where ϕ_1 denotes the scattering potential, and ϕ_2 is the radiation potential.

The fluid domain is divided into eight sub-regions, i.e., Ω_n ($n=1, \dots, 8$). Referring to Figure 1, the fluid regions Ω_n ($n=1, \dots, 8$) denotes the fluid region in the weather side of the front-wall ($x < x_{1,l}$, $-h < z < 0$), beneath the front-wall ($x_{1,l} < x < x_{1,r}$, $-h < z < -h_1$), between the front-wall and mid-wall ($x_{1,r} < x < x_{2,l}$, $-h < z < 0$), beneath the mid-wall ($x_{2,l} < x < x_{2,r}$, $-h < z < -h_2$), between the mid-wall and rear-wall ($x_{2,r} < x < x_{3,l}$, $-h < z < 0$), beneath the rear-wall ($x_{3,l} < x < x_{3,r}$, $-h < z < -h_2$), between the rear-wall and VLFS ($x_{3,r} < x < x_{4,l}$, $-h < z < 0$), and beneath the VLFS ($x > x_{4,l}$, $-h < z < -T$), respectively. Symbolically, the velocity potential in Ω_n ($n=1, \dots, 8$) was expressed as $\phi_\ell^{(n)}$, which represents the relevant scattering potential for $\ell=1$ and the radiation potential for $\ell=2$. $\phi_\ell^{(n)}$ shall satisfy governing equation, the free surface condition, elastic plate condition, the impetration condition (both seabed and the OWC walls), pressure-forced surface condition inside the OWC chamber, and the far-field condition. For the present problem, the governing equation can be written as:

$$\frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial z^2} = 0 \quad (2)$$

The boundary conditions for the scattering and radiation potential can be expressed as:

$$\begin{cases} \frac{\partial \phi_\ell^{(n)}}{\partial z} = \frac{\omega^2}{g} \phi_\ell^{(n)} + \frac{i\omega \delta_{j,n}^{\ell=2}}{\rho g} \left(x < x_{1,l}, \text{ or } x_{m,r} < x < x_{m+1,l}, \right. \\ \quad \left. z = 0, m = 1, 2, 3, j = 3, 5 \right) \\ \frac{\partial \phi_\ell^{(n)}}{\partial z} = 0 \left(x_{m,l} < x < x_{m,r}, z = -h_m, m = 1, 2, 3 \right) \\ \left[EI \frac{\partial^4}{\partial x^4} - m_s \omega^2 + \rho g \right] \frac{\partial \phi_\ell^{(8)}}{\partial z} - \rho \omega^2 \phi_\ell^{(8)} = 0 \left(x > x_{4,l}, \right. \\ \quad \left. z = -T \right) \\ \frac{\partial \phi_\ell^{(n)}}{\partial x} = 0 \left(x = x_{4,l}, -T < z < 0 \text{ or } x = x_{m,j}, \right. \\ \quad \left. -h_m < z < 0, m = 1, 2, 3, j = l, r \right) \\ \frac{\partial \phi_\ell^{(n)}}{\partial z} = 0 \left(-\infty < x < +\infty, z = -h \right) \\ \phi_\ell^{(n)} \text{ outgoing: finite value } (|x| \rightarrow \infty, n = 1, 8) \end{cases} \quad (3)$$

where the initial moment $I = C^3/[12(1-\nu^2)]$; the mass $m_s = \rho_s C$; C , E , ν , ρ_s , ρ , and g are respectively the thickness, Young's modulus, the Poisson's ratio, the surface density of the VLFS, the water density, and the gravitational acceleration.

The deformation of the VLFS is subjective to the edge conditions at the left end ($x = x_{4,l}$, $z = -T$). There are three typical edge conditions (Sahoo et al., 2001), i.e., free edge, simply supported edge, and built-in edge conditions, which can be mathematically expressed respectively, as

$$\frac{\partial^4 \phi_\ell^{(8)}}{\partial x^3 \partial z} = 0 \text{ and } \frac{\partial^3 \phi_\ell^{(8)}}{\partial x^2 \partial z} = 0 \quad (4)$$

$$\frac{\partial^3 \phi_\ell^{(8)}}{\partial x^2 \partial z} = 0 \text{ and } \frac{\partial \phi_\ell^{(8)}}{\partial z} = 0 \quad (5)$$

and

$$\frac{\partial^2 \phi_\ell^{(8)}}{\partial x \partial z} = 0 \text{ and } \frac{\partial \phi_\ell^{(8)}}{\partial z} = 0 \quad (6)$$

2.2 Method of solution

By implementing the eigenfunction matching method, the velocity potential corresponding to each sub-region can be written respectively as:

$$\left\{ \begin{aligned} \phi_{\ell}^{(1)} &= -\frac{igA}{\omega} \left(Z_1(\kappa_1 z) e^{ikx} + \sum_{n=1}^{\infty} A_n^{(\ell,1)} e^{\kappa_n x} Z_n(\kappa_n z) \right) \\ \phi_{\ell}^{(2)} &= -\frac{igA}{\omega} \left(A_1^{(\ell,2)} x + A_1^{(\ell,3)} + \sum_{n=2}^{\infty} \left(\frac{A_n^{(\ell,2)} e^{-\gamma_{1,n} x}}{+A_n^{(\ell,3)} e^{\gamma_{1,n} x}} \right) V_n(\gamma_{1,n} z) \right) \\ \phi_{\ell}^{(3)} &= -\frac{igA}{\omega} \left(\sum_{n=1}^{\infty} \left(\frac{A_n^{(\ell,4)} e^{-\kappa_n x}}{+A_n^{(\ell,5)} e^{\kappa_n x}} \right) Z_n(\kappa_n z) \right) - \frac{i\delta_{\ell,m}}{\rho\omega}, (m=2,3) \\ \phi_{\ell}^{(4)} &= -\frac{igA}{\omega} \left(A_1^{(\ell,6)} x + A_1^{(\ell,7)} + \sum_{n=2}^{\infty} \left(\frac{A_n^{(\ell,6)} e^{-\gamma_{2,n} x}}{+A_n^{(\ell,7)} e^{\gamma_{2,n} x}} \right) V_n(\gamma_{2,n} z) \right) \\ \phi_{\ell}^{(5)} &= -\frac{igA}{\omega} \left(\sum_{n=1}^{\infty} \left(\frac{A_n^{(\ell,8)} e^{-\kappa_n x}}{+A_n^{(\ell,9)} e^{\kappa_n x}} \right) Z_n(\kappa_n z) \right) - \frac{i\delta_{\ell,m}}{\rho\omega}, (m=2,4) \\ \phi_{\ell}^{(6)} &= -\frac{igA}{\omega} \left(A_1^{(\ell,10)} x + A_1^{(\ell,11)} + \sum_{n=2}^{\infty} \left(\frac{A_n^{(\ell,10)} e^{-\gamma_{3,n} x}}{+A_n^{(\ell,11)} e^{\gamma_{3,n} x}} \right) V_n(\gamma_{3,n} z) \right) \\ \phi_{\ell}^{(7)} &= -\frac{igA}{\omega} \left(\sum_{n=1}^{\infty} \left(\frac{A_n^{(\ell,12)} e^{-\kappa_n x}}{+A_n^{(\ell,13)} e^{\kappa_n x}} \right) Z_n(\kappa_n z) \right) \\ \phi_{\ell}^{(8)} &= -\frac{igA}{\omega} \left(A_0^{(\ell,14)} e^{i\lambda_0 x} U_0(\lambda_0 z) + \sum_{n=-2}^{-1} A_n^{(\ell,14)} e^{-\lambda_n x} U_n(\lambda_n z) + \sum_{n=1}^{\infty} A_n^{(\ell,14)} e^{-\lambda_n x} U_n(\lambda_n z) \right) \end{aligned} \right. \quad (7)$$

where $A_n^{(\ell,m)}$ are the unknown coefficient to be solved, $m=1, 2, \dots, 14$; $\ell=1, 2, 3, 4$, and only 3, 4 is taken when calculating the radiation volume flux. A is the incident wave amplitude; the vertical eigenfunction of $Z_n(\kappa_n z)$, $V_n(\gamma_{j,n} z)$, and $U_n(\lambda_n z)$ are defined as:

$$Z_n(\kappa_n z) = \cos[\kappa_n(z+h)] / \cos(\kappa_n h) \quad (8)$$

$$V_n(\gamma_{j,n} z) = \begin{cases} \sqrt{2}/2 & n=1 \\ \cos[\gamma_{j,n}(z+h)] / \cos[\gamma_{j,n}(h-h_j)] & n \geq 2 \end{cases} \quad (9)$$

and

$$U_n(\lambda_n z) = \begin{cases} \cosh[\lambda_n(z+h)] / \cosh[\lambda_n(h-T)] & n=0 \\ \cos[\lambda_n(z+h)] / \cos[\lambda_n(h-T)] & n=-2, -1, 1, 2, \dots \end{cases} \quad (10)$$

respectively. The eigenvalues of k and κ_n ($n \geq 2$) satisfied

the dispersion relation of $\omega^2 = gk \tanh kh$ and $\omega^2 = -g\kappa_n \tanh \kappa_n h$ ($n \geq 2$), respectively; $\kappa_1 = -ik$. The eigenvalues $\gamma_{j,n}$ are given by $(n-1)\pi/(h-h_j)$, ($j=1, 2, 3$; $n=2, 3, \dots$). λ_n are the positive real roots of following dispersion relations of:

$$\begin{cases} \lambda_0(K\lambda_0^4 + W) \tanh[\lambda_0(h-T)] = 1 & n=0 \\ -\lambda_n(K\lambda_n^4 + W) \tan[\lambda_n(h-T)] = 1 & n=-2, -1, 1, 2, \dots \end{cases} \quad (11)$$

where $K = EI/(\rho\omega^2)$ and $W = (\rho g - m_s \omega^2)/(\rho\omega^2)$. The first equation in Eq. (11) has only one positive real root λ_0 , and the second equation has two complex roots with the form of $\lambda_{-1} = \alpha + i\beta$ and $\lambda_{-2} = \alpha - i\beta$ (α and β are both positive real numbers). In addition, the second equation also has infinite positive real roots λ_n ($n=1, 2, 3, \dots$). Thus, the first term in $\phi_{\ell}^{(8)}$ represents propagation-mode flexural-gravity waves, the second term means propagation waves with rapidly decaying amplitudes, and the third term represents a series of evanescent-mode flexural-gravity waves (Guo et al., 2016). Furthermore, the improved Newton iterative method is used to solve complex roots (Wang et al., 2007), which greatly simplifies the process of solving complex roots.

The complex expansion coefficients $A_n^{(\ell,1)} \sim A_n^{(\ell,14)}$ can be determined using the edge conditions (i.e., Eqs. (4)-(6)), and the continuity conditions for the scattering and radiated spatial potentials (Eq. A(1)). The detailed solving procedure for the case of free edge condition is given in Appendix A. Once the unknown expansion coefficients are determined, the velocity potentials in eight regions and various hydrodynamic quantities can be evaluated.

2.3 Hydrodynamic parameter

2.3.1 Volume flux inside pneumatic chamber

The excitation volume flux can be obtained through an integration of the vertical water velocity, induced by the joint action of the incident and diffracted wave potentials, across the free surface inside the chambers as:

$$\begin{aligned} Q_m^{\ell} &= \int_{x_{m,r}}^{x_{m+1,l}} \frac{\partial(\phi_{\ell}^{(2m+1)})}{\partial z} dx \Big|_{z=0} \\ &= -i\omega A \left[\sum_{n=1}^{\infty} \left(\frac{A_n^{(\ell,4m)} e^{-\kappa_n x_{m+1,l}} - e^{-\kappa_n x_{m,r}}}{+A_n^{(\ell,4m+1)} \frac{e^{\kappa_n x_{m+1,l}} - e^{\kappa_n x_{m,r}}}{\kappa_n}} \right) \right] \end{aligned} \quad (12)$$

where $\ell=1, m=1, 2$.

The radiation volume flux can be obtained through an integration of the vertical water velocity, induced by the radiated wave across the free surface inside the chamber as:

$$Q_{m,j}^{\ell} = \int_{x_{m,r}}^{x_{m+1,l}} \frac{\partial(\phi_{\ell}^{(2j+1)})}{\partial z} dx \Big|_{z=0}$$

$$= -i\omega A \left[\sum_{n=1}^{\infty} \left(\frac{A_n^{(\ell,4j)} e^{-\kappa_n x_{m+1,l}} - e^{-\kappa_n x_{m,r}}}{-\kappa_n} + \frac{A_n^{(\ell,4j+1)} e^{\kappa_n x_{m+1,l}} - e^{\kappa_n x_{m,r}}}{\kappa_n} \right) \right] \quad (13)$$

where $Q_{m,j}^{\ell}$ is the radiation volume flux of water column m caused by the pressure forced motion of water column j ; $m=1, 2, j=1, \ell=3$ and $m=1, 2, j=2, \ell=4$. At the same time, where $c_{m,j} = \text{Re}(Q_{m,j}^{\ell})$ and $\mu_{m,j} = \text{Im}(Q_{m,j}^{\ell})$ are the so-called radiation conductance and radiation susceptance (Evans and Porter, 1995).

2.3.2 Hydrodynamic efficiency

The pressure vector and the complex amplitude of the total volume flux can be written as:

$$\left\{ \begin{bmatrix} c_{11} & c_{12} \\ c_{21} & c_{22} \end{bmatrix} + \begin{bmatrix} c_{\text{PTO}}^{(1)} & \\ & c_{\text{PTO}}^{(2)} \end{bmatrix} - i \begin{bmatrix} \mu_{11} & \mu_{12} \\ \mu_{21} & \mu_{22} \end{bmatrix} + \begin{bmatrix} \mu_{\text{PTO}}^{(1)} & \\ & \mu_{\text{PTO}}^{(2)} \end{bmatrix} \right\} \begin{bmatrix} p_1 \\ p_2 \end{bmatrix} = \begin{bmatrix} Q_1^{\ell} \\ Q_2^{\ell} \end{bmatrix} \quad (14)$$

where $n=1, 2$, and p_n denotes the pressure in the n th chamber, $c_{\text{PTO}}^{(n)}$ represents the PTO damping implemented on the n th chamber, $\mu_{\text{PTO}}^{(n)}$ corresponds to the effects of air compressibility, and there can be found following as:

$$\mu_{\text{PTO}}^{(n)} = \frac{\omega V_n}{c_a^2 \rho_0} \quad (15)$$

where c_a is the sound velocity in air, ρ_0 is the static air density, and V_n is the initial air volume inside the n th pneumatic chamber, $V_n = 0.1 d_n h$.

It is difficult to obtain an analytical expression for the optimal PTO damping of a dual-chamber OWCs, but it can be obtained by numerical approximation. Wang (2018) and Wang et al. (2021) introduced the numerical approximation process in detail. In this paper, the PTO damping near the maximum hydrodynamic efficiency is used (He et al., 2019):

$$c_{\text{PTO}}^{(n)} = \sqrt{c^2 + (\mu + \mu_{\text{PTO}}^{(n)})^2} \quad (16)$$

which represents the optimal PTO damping of an isolated OWC.

The power output efficiency corresponding to chamber n ($n=1, 2$) can be expressed as:

$$P_n = \frac{1}{2} c_{\text{PTO}}^{(n)} p_n^2 \quad (17)$$

The p_n can be obtained by solving the equation (14), and the PTO damping of $C_{\text{PTO}}^{(n)}$ is chosen as the equation (16).

The incident waves power per width can be written as:

$$P_{\text{incident}} = \frac{\rho g A^2 \omega}{4k} \left(1 + \frac{2kh}{\sinh 2kh} \right) \quad (18)$$

The hydrodynamic efficiency corresponding to chamber n ($n=1, 2$) can be calculated as:

$$\eta_n = \frac{P_n}{P_{\text{incident}}} \quad (19)$$

The total hydrodynamic efficiency η can be regarded as the sum of η_n .

2.3.3 Reflection and transmission coefficient

The reflection coefficient K_R and the transmission coefficient K_T of the proposed system can be expressed as:

$$\begin{cases} K_R = |A_1^{(1,1)} + p_1 A_1^{(3,1)} + p_2 A_1^{(4,1)}| \\ K_T = |A_0^{(1,14)} + p_1 A_0^{(3,14)} + p_2 A_0^{(4,14)}| \frac{\lambda_0 \tanh \lambda_0 (h - T)}{k \tanh kh} \end{cases} \quad (20)$$

2.3.4 Hydroelastic parameters

The dimensionless vertical displacement of VLFS can be written as:

$$\zeta = \frac{i}{\omega} \left| \frac{\partial \phi_1^{(8)}}{\partial z} + p_1 \frac{\partial \phi_3^{(8)}}{\partial z} + p_2 \frac{\partial \phi_4^{(8)}}{\partial z} \right|_{z=-T} \quad (21)$$

The dimensionless strain of the VLFS in this paper, unless otherwise stated, is located at positive infinity and can be written as:

$$\varepsilon = \frac{c}{2\omega} \left| \frac{\partial^3 \phi_1^{(8)}}{\partial^2 x \partial z} + p_1 \frac{\partial^3 \phi_3^{(8)}}{\partial^2 x \partial z} + p_2 \frac{\partial^3 \phi_4^{(8)}}{\partial^2 x \partial z} \right|_{z=-T} \quad (22)$$

The dimensionless shear force of the VLFS is:

$$\tau = \frac{EI}{\rho g d \omega} \left| \frac{\partial^4 \phi_1^{(8)}}{\partial^3 x \partial z} + p_1 \frac{\partial^4 \phi_3^{(8)}}{\partial^3 x \partial z} + p_2 \frac{\partial^4 \phi_4^{(8)}}{\partial^3 x \partial z} \right|_{z=-T} \quad (23)$$

3 Verification

In this section, we firstly conduct the convergence analysis of the analytical model, and then the verifications are made based on the Haskind relationship and the wave energy flux conversation. Referring to Hong et al. (2006), the fundamental parameters of VLFS-OWCs are fixed as: $A=1$ m, $h=30$ m, $\rho=1025$ kg/m³, $g=9.81$ m/s², $E=2.06 \times 10^{11}$ Pa, $\nu=0.3$, $\rho_s=7800$ kg/m³, $I=0.666$, $T/h=1/15$. In the following sections, the hydrodynamic parameters

and PTO system are nondimensionalized by

$$\left\{ \bar{c}_{i,j}, \bar{\mu}_{i,j}, \bar{c}_{\text{PTO}}^{(n)}, \bar{\mu}_{\text{PTO}}^{(n)} \right\} = \frac{\rho g}{\omega d_1} \left\{ c_{i,j}, \mu_{i,j}, c_{\text{PTO}}^{(n)}, \mu_{\text{PTO}}^{(n)} \right\},$$

$$\bar{Q}_m^\ell = \frac{|Q_m^\ell|}{\omega d_1 A}. \quad (24)$$

3.1 Convergence analysis

A convergence analysis is performed for the dual-chamber VLFS-OWCs with $a_1/h = a_2/h = a_3/h = 1/60$, $h_1/h = h_2/h = h_3/h = 0.1$, $d_1/h = d_2/h = 1/6$, $d_3/h = 0.1$, $x_{1,i} = 0$, $V_1 = 0.1d_1h$, $V_2 = 0.1d_2h$. Figure 2 illustrates the impact of truncation number M on K_R , K_T , \bar{c}_{11} , \bar{c}_{22} , $\bar{\mu}_{11}$, $\bar{\mu}_{22}$. It can be seen from Figure 2 that the truncation number of 20 presents excellent convergence.

3.2 Haskind relationship

The excitation volume flux can be obtained by integrating the vertical water velocity induced by the joint action of the incident and diffracted wave potentials. This method is regarded as a direct method. In addition, using the Haskind relationship (Haskind, 1957), it can also be calculated based on the far-field radiation waves, which is termed the indirect method. The calculation of the dimensionless excitation volume flux using the direct and indirect method are given by:

$$\begin{cases} \bar{Q}^{(1)} = \bar{Q}_1^1 + \bar{Q}_2^1 \\ \bar{Q}^{(2)} = -\frac{\rho g^2 A^2 A_1^{(2,1)} (\sin \kappa_1 h \cos \kappa_1 h + \kappa_1 h)}{i \omega^2 d_1 A \cos^2 \kappa_1 h} \end{cases} \quad (25)$$

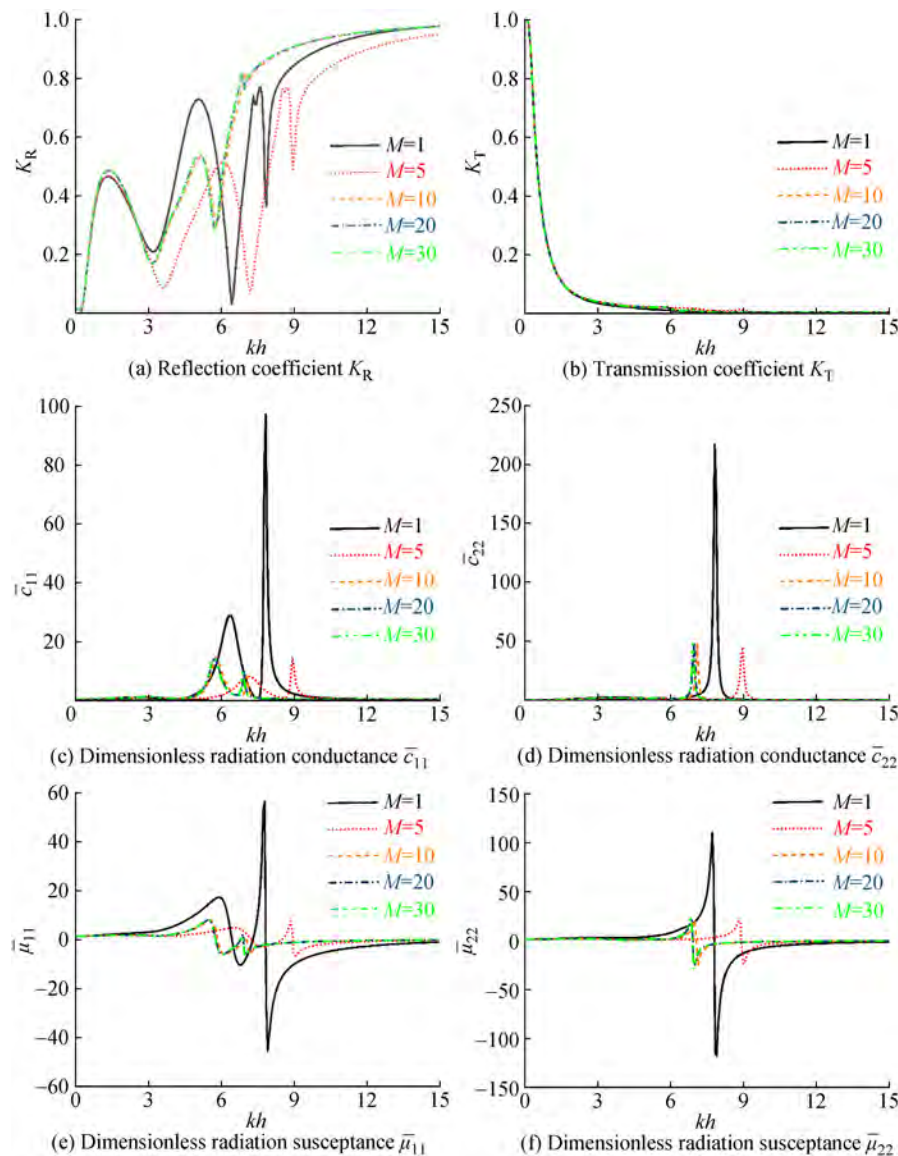


Figure 2 Variations of K_R , K_T , \bar{c}_{11} , \bar{c}_{22} , $\bar{\mu}_{11}$, and $\bar{\mu}_{22}$ versus the kh with different truncation number $M=1, 5, 10, 20, 30$

As shown in Figure 3, the dimensionless excitation volume flux calculated by the two different methods agrees well, which may verify the solution of the radiation/diffraction problem.

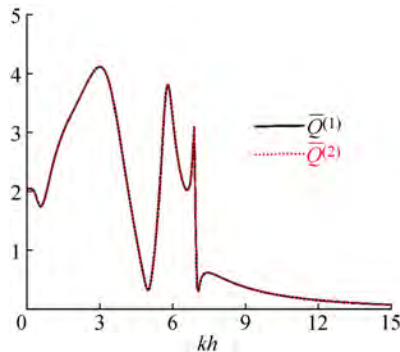


Figure 3 Results of the dimensionless excitation volume flux calculated by the direct and indirect methods

3.3 Wave energy flux conservation

The K_R , K_T and η for VLFS-OWCs with dual-chamber are calculated ($M=20$). From Figure 4, we find that the wave energy flux conservation is satisfied well (i.e., $K_R^2 + K_T^2 + \eta_1 + \eta_2 = 1$), verifying the semi-analytical model.

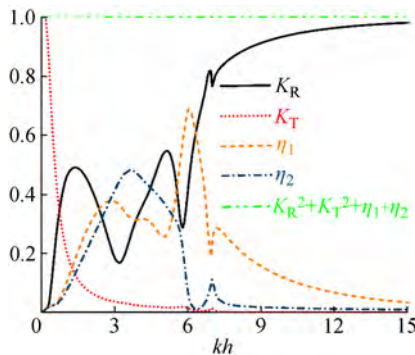


Figure 4 Results of the reflection/transmission coefficient and the hydrodynamic efficiency

4 Results and discussion

The spacing between the OWC structure and the VLFS and edge conditions of the VLFS are two key parameters for the performance of the system. In this section, we explore the influence of the key parameters of OWC damping, edge conditions and spacing on the hydrodynamic performance of the VLFS. The structural/physical parameters of the VLFS-OWCs system are as follows: $h=30$ m, $a_1/h=a_2/h=a_3/h=1/60$, $d_1/h=d_2/h=1/6$, $d_3/h=0.1$, $h_1/h=h_2/h=h_3/h=0.1$, $V_1=0.1d_1h$, $V_2=0.1d_2h$, $x_{1,j}=0.0$; $\rho=1025$ kg/m³, $g=9.81$ m/s², $E=2.06 \times 10^{11}$ Pa, $\nu=0.3$, $\rho_s=7800$ kg/m³, $I=0.666$, and $T/h=1/15$.

4.1 Comparison between the VLFS with and without OWCs

To compare the effect of the number of OWC chambers, both the single- and dual-chamber OWCs are considered here. Note that the breadth of the single-chamber OWC is identical to that of the dual-chamber device. The structural parameters of the single-chamber device are as follows: the thickness of the wall is $1/60 h$, the draft of the wall is $0.1 h$, the breadth of the chamber is $1/3 h + 1/60 h$, the spacing between the OWC and VLFS is $0.1 h$. Here we balance the hydrodynamic interaction between OWC and VLFS by exploring the characteristics of the reflection coefficient K_R , total hydrodynamic efficiency η , transmission coefficient K_T , dimensionless strain ε , dimensionless excitation volume flux $\bar{Q}^{(1)}$, dimensionless radiation conductance \bar{c} and dimensionless radiation susceptance $\bar{\mu}$. Figure 5 plots the results of K_R , η , K_T , ε , $\bar{Q}^{(1)}$, \bar{c} and $\bar{\mu}$ as function of kh . Note that the free edge condition of the VLFS is considered.

From Figure 5(a), it is found that K_R can be reduced by implementing the OWCs on the weather side. Intuitively, it is because the part of incident wave power is absorbed by OWCs (see Figure 5(b)). Therefore, the reflection coefficient curve of the single-chamber OWC and dual-chamber OWCs is of interest. Interestingly, we observe that there exists a peak of K_R at $kh=5.76$ for the VLFS with single-chamber OWC, accounting for the Bragg resonance (Garnaud and Mei, 2009; Zhao et al., 2021), which is caused by the wave interacting with multiple OWC chamber walls and the VLFS structures. However, the wave reflection corresponding to the VLFS with dual-chamber OWCs is relatively milder. K_R of VLFS with single- and dual-chamber OWCs has a valley value at $kh \approx 3$, which is due to the fact that the peak hydrodynamic efficiency occurs (see Figure 5(b)).

Figure 5(b) plots the hydrodynamic efficiency of the single- or dual-chamber OWCs with and without the VLFS. It can be found that the VLFS affects the performance of the OWCs significantly, which is mainly reflected in that the η of OWCs increased because of the wave reflection by VLFS. It should be noted that the variation of hydrodynamic efficiency at $kh=5.76$ is opposite to that of the reflection coefficient. Furthermore, the hydrodynamic efficiency remains 0 while the Bragg resonance is triggered. Notably, the hydrodynamic efficiency of 0 is removed for the VLFS with dual-chamber OWCs, which corresponds to the trend of wave reflection in Figure 5(a).

From Figures 5(c) and (d), we conclude that the presence of the OWCs affects the transmission coefficient slightly. Interestingly, it is found that the strain of the VLFS is significantly reduced due to the shadow effect of the OWCs.

The variation of the $\bar{Q}^{(1)}$ of the single-chamber OWC

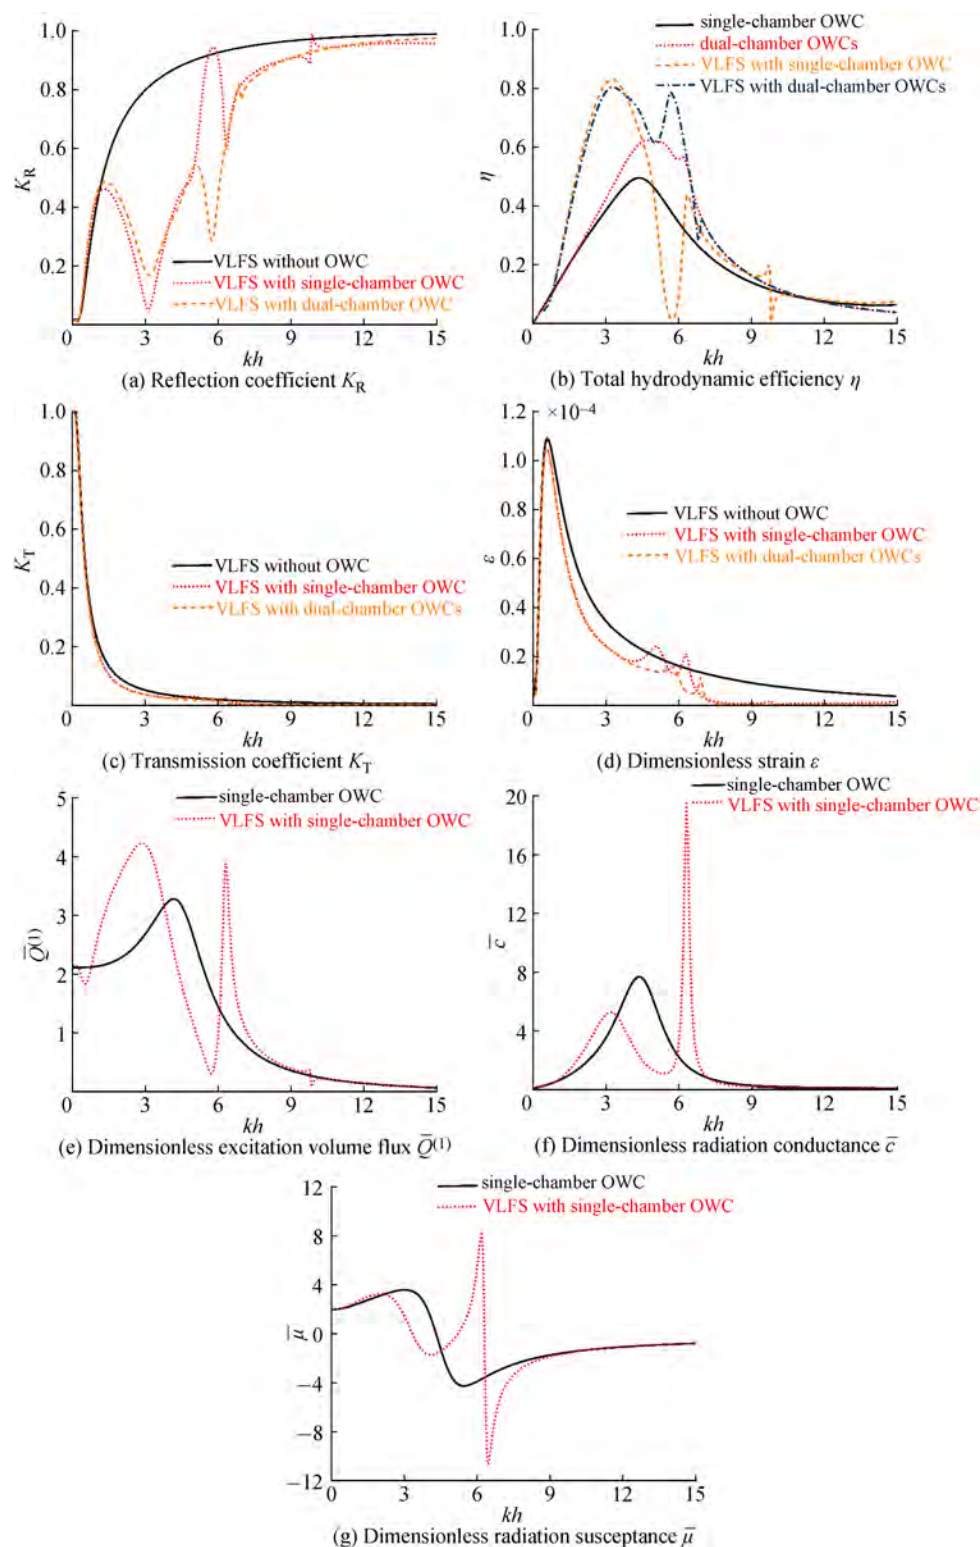


Figure 5 Variations of K_R , η , K_T , ε , $\bar{Q}^{(1)}$, \bar{c} , and $\bar{\mu}$ versus dimensionless wave number kh with and without OWCs

with and without VLFS is shown in Figure 5(e), as it can be seen that the $\bar{Q}^{(1)}$ of OWC with VLFS becomes more complicated. It is worth noting that the peak value of $\bar{Q}^{(1)}$ appears at $kh=6.36$, which leads to the peak value

of η in Figure 5(b).

Figures 5(f) and (g) show the results of \bar{c} and $\bar{\mu}$ of single-chamber OWC with and without VLFS. In general, \bar{c} and $\bar{\mu}$ of single-chamber VLFS-OWC are smaller than that

of isolated single-chamber OWC.

In summary, the absorption of wave energy by the OWCs can reduce the K_R and ε of the system. But, adversely, the reflection of wave energy by VLFS can increase the η of OWC. Hence, the hydrodynamic synergies can be produced for the interaction of the OWC and the VLFS with proper design. But attention should be paid to the occurrence of a strong reflection phenomenon, which shall be avoided in the engineering design.

4.2 Effect of the edge conditions of the VLFS

Edge conditions (Guo et al., 2016) affect the hydrodynamic characteristics of the VLFS. Compared with single-chamber OWC in the previous section, dual-chamber OWCs has better advantages in hydrodynamic efficiency and reduction of reflection coefficient. In this section, we investigate the performance of the VLFS with dual-chamber OWCs system with different edge conditions (i.e., free edge, simply supported edge, and built-in edge). The results of the K_R , η and ε corresponding to different edge conditions are shown in Figure 6.

In general, the edge condition slightly affects the hydrodynamics of the VLFS-OWCs system. The results corresponding to the conditions of simply supported edge and built-in edge are similar. However, a noticeable difference was observed while comparing the results of the free edge and the built-in edge (or simply supported edge). Notably, the strain of the VLFS is the largest under the condition of free edge. Physically, this shows that the free edge of VLFS is favorable for wave propagation. Teng et al. (2006) demonstrated that the transmission coefficient for the VLFS is most efficient under the free edge.

4.3 Effect of the spacing between the OWCs and VLFS

The spacing dominates the performance of the multi-body system. In this section, we investigate the effect of the spacing between OWCs and the VLFS on the performance of the VLFS-OWCs system. By referring (Hong et al., 2006), Figure 7 shows the K_R , η , ε , η_1 , η_2 , \bar{c}_{11} , \bar{c}_{12} , and $\bar{c}_{11} + \bar{c}_{12}$ of VLFS-OWCs system for different spacings (i.e., $d_3/h=0.01, 0.1, 0.2, 0.3$). The geometrical/physical parameters are fixed as $a_1/h=a_2/h=a_3/h=1/60$, $d_1/h=d_2/h=1/6$, $h_1/h=h_2/h=h_3/h=0.1$, $V_1=0.1d_1h$, $V_2=0.1d_2h$, $I=0.666$, and $T/h=1/15$. The free edge condition is used here.

From Figure 7(a), we found strong oscillations in the range of $0.78 < kh < 6.54$ for the reflection coefficient. The spacing dominates the location and the number of oscillations. This is similar to that found in Ning et al. (2017) and Zhao et al. (2021), who paid attention to the effect of the spacing of the multi-pontoon system. As is illustrated in Section 4.1, the strong reflection is attributed to the Bragg resonance. Moreover, the spacing dominated the occur-

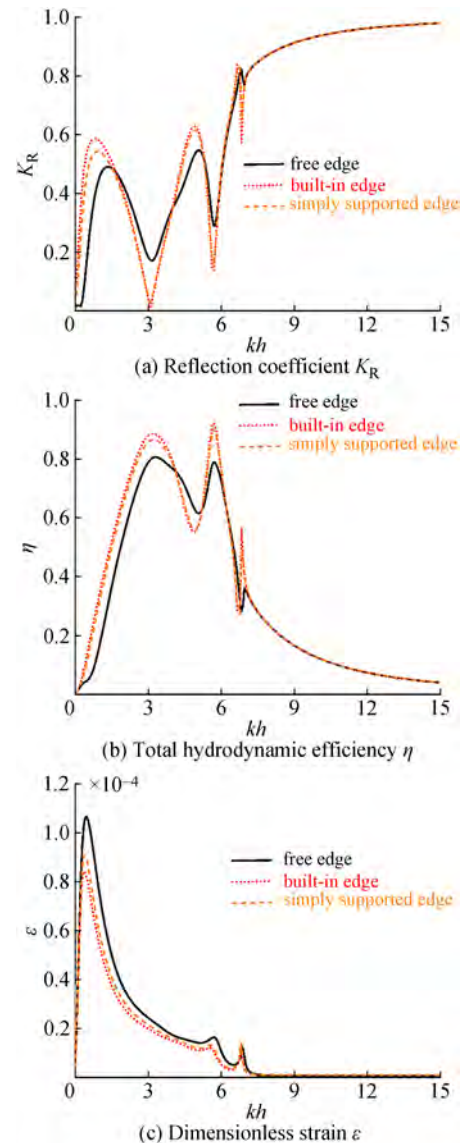


Figure 6 Variations of K_R , η , and ε versus dimensionless wave number kh with different edge conditions

rence of the Bragg resonance.

The trend of η is opposite to that of the K_R . Multiple peaks are observed, which corresponds to that the valleys of the reflection coefficient. From the hydrodynamic efficiency curves of chambers 1 and 2 in Figure 7 (d, e), it can be known that the hydrodynamic efficiency peak ($d_3/h=0.2$, $kh \approx 5.1$; $d_3/h=0.3$, $kh \approx 4.7$) is triggered by the increment of hydrodynamic efficiency of chamber 1. The radiation conductance reflects the wave energy absorption capacity of OWC, and the amplitude is maximum at this frequency (Figure 7 (h)). The \bar{c}_{12} corresponding to the peak value of hydrodynamic efficiency is positive and maximum, and the hydrodynamic interaction between OWCs shows a positive synergistic effect, which is the main reason for the multi-peak phenomenon.

From Figure 8, it can be found that the K_R , η , and K_T vary periodically as the spacing between the OWCs and VLFS

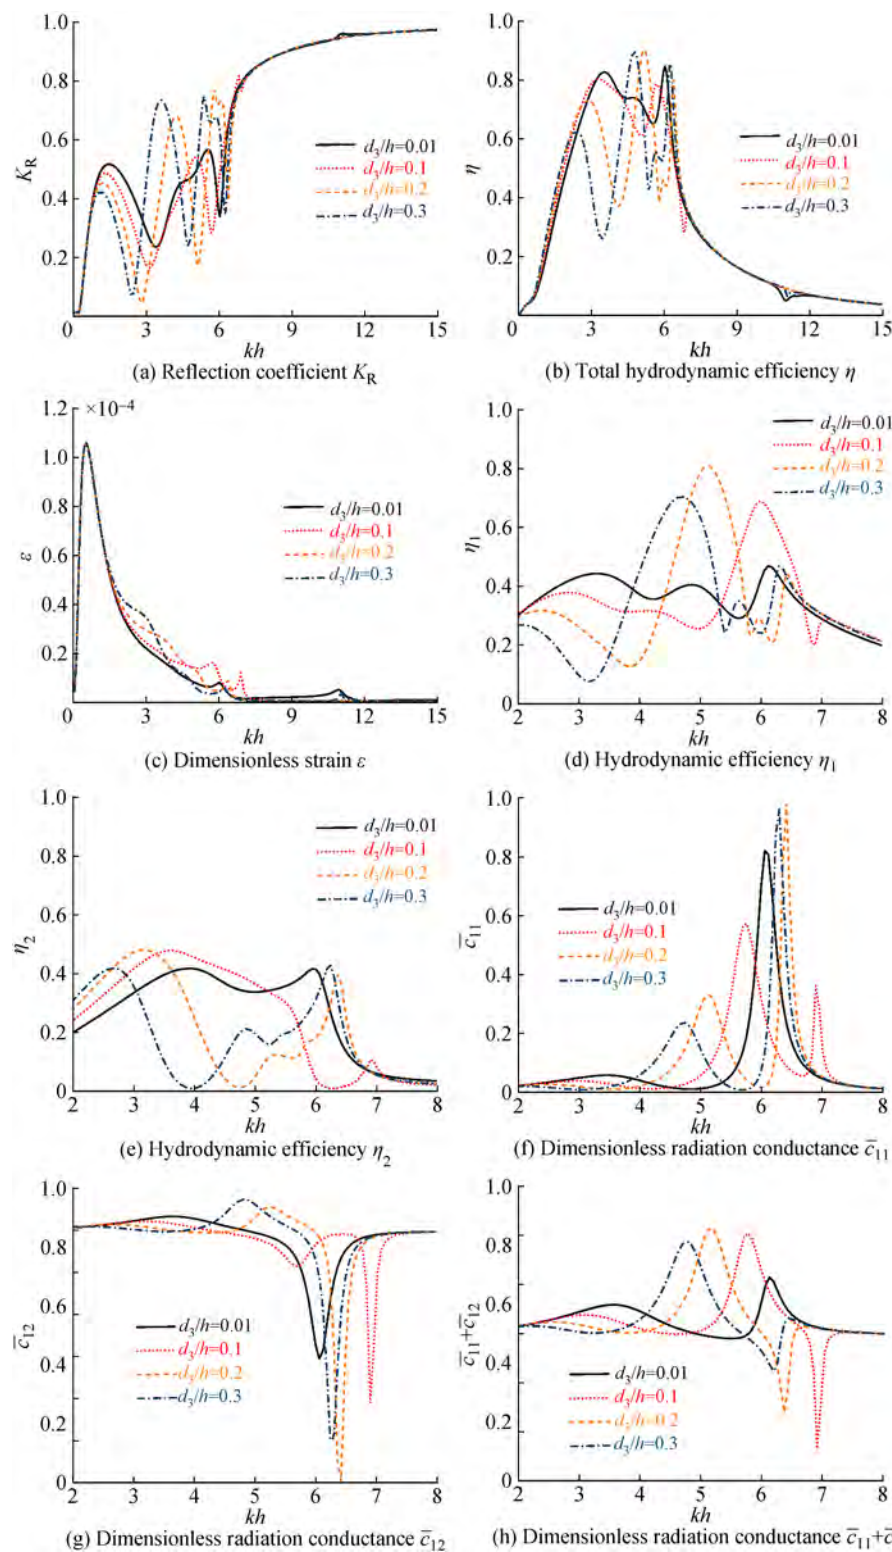


Figure 7 Variations of K_R , η , ε , η_1 , η_2 , \bar{c}_{11} , \bar{c}_{12} , and $\bar{c}_{11} + \bar{c}_{12}$ versus dimensionless wave number kh with different spacing $d_3/h = 0.01, 0.1, 0.2, 0.3$

increases, the dimensionless spacing kd_3/π significantly affects the hydrodynamic performance of the system. Sarkar et al. (2015) found that the condition of $kd_3/\pi = 0.5 + n$ triggered the sloshing resonance in the water region be-

tween the wave energy device and the seawall, and the hydrodynamic efficiency showed a valley value. The trigger condition is related to the K_R of the seawall and the size of the wave energy device, and there will be a

deviation (Zhao et al., 2021). It is worth noting that the triggering conditions of sloshing resonance in the water region between OWCs and VLFS are different under different kh , but the variation periods of K_R , η , and K_T are $kd_3/\pi=1$, which is because the reflection effect of VLFS changes with the change of kh .

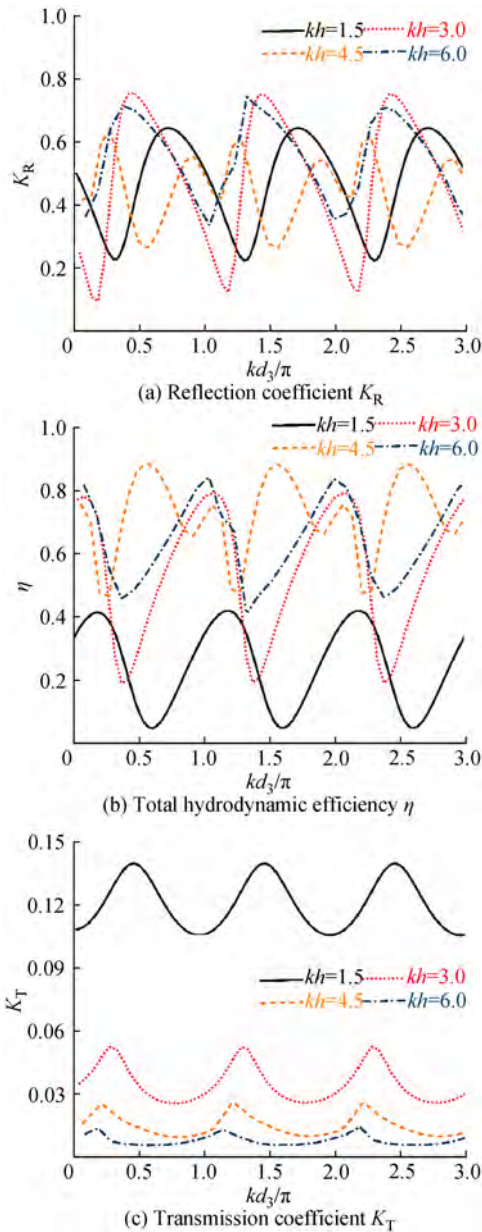


Figure 8 K_R , η , and ε versus dimensionless spacing kd_3/π with different dimensionless wave number kh

In summary, the spacing imposes an impact on the reflection coefficient and efficiency. However, the spacing between the OWCs and VLFS affects the strain of the VLFS slightly. The spacing is the key parameter for the hydrodynamic performance of VLFS-OWCs, so it should be fully considered in engineering design.

5 Conclusions

The matching eigenfunction expansion method is applied to investigate wave interaction with VLFS-OWCs. This method is validated by the Haskind relationship and energy conservation. Then, the interaction between waves and VLFS-OWCs is discussed extensively. The following conclusions could be drawn:

1) VLFS-OWCs have a lower K_R , K_T , and ε in the frequency range of ordinary compared to VLFS, mainly due to the wave energy conversion of OWC.

2) Compared with OWC, VLFS-OWCs have a higher η , and this effect gain is more effective for dual-chamber OWC. This is because the wave energy reflected by VLFS increases the η of OWC.

3) Bragg resonances are triggered by the single-chamber VLFS-OWC, caused by the wave interacting with multiple OWC chamber walls and the VLFS.

4) The minimum η of OWC and the maximum ε of VLFS appear when the left end of VLFS is under the free edge because the free motion of the VLFS ends has the most negligible effect on wave propagation.

5) Compared with OWC without VLFS, the η and K_R of VLFS-OWCs demonstrate multiple peaks. This is mainly due to the hydrodynamic interaction between the two OWCs.

Appendix A

We will use pressure continuity and velocity continuity to determine the unknown coefficients. The continuity conditions of scattering and radiation space potential are as follows:

$$\frac{\partial \phi_{\ell}^{(2m-1)}}{\partial x} = \begin{cases} 0 & (x = x_{m,l}, -h_m < z < 0) \\ \frac{\partial \phi_{\ell}^{(2m)}}{\partial x} & (x = x_{m,l}, -h < z < -h_m) \end{cases}, m = 1, 2, 3 \quad A(1)$$

$$\frac{\partial \phi_{\ell}^{(2m+1)}}{\partial x} = \begin{cases} 0 & (x = x_{m,r}, -h_m < z < 0) \\ \frac{\partial \phi_{\ell}^{(2m)}}{\partial x} & (x = x_{m,r}, -h < z < -h_m) \end{cases}, m = 1, 2, 3 \quad A(2)$$

$$\frac{\partial \phi_{\ell}^{(7)}}{\partial x} = \begin{cases} 0 & (x = x_{4,l}, -T < z < 0) \\ \frac{\partial \phi_{\ell}^{(8)}}{\partial x} & (x = x_{4,l}, -h < z < -T) \end{cases} \quad A(3)$$

$$\phi_{\ell}^{(2m-1)} = \phi_{\ell}^{(2m)} \quad x = x_{m,l}, -h < z < -h_m, m = 1, 2, 3 \quad A(4)$$

$$\phi_\ell^{(2m)} = \phi_\ell^{(2m+1)} \quad x = x_{m,r}, -h < z < -h_m, m = 1, 3, 3 \quad \text{A(5)}$$

$$\phi_\ell^{(7)} = \phi_\ell^{(8)} \quad x = x_{4,l}, -h < z < -T \quad \text{A(6)}$$

We make use of the orthogonality of both trigonometric functions and vertical eigenfunction to obtain the equation system with M . Together with the application of the velocity continuity conditions, we have:

$$\begin{aligned} & \int_{-h}^0 \left(ikZ_1(\kappa_1 z) e^{ikx} + \sum_{n=1}^{\infty} A_n^{(\ell,1)} \kappa_n e^{\kappa_n x} Z_n(\kappa_n z) \right) Z_m(\kappa_m z) dz \\ &= \int_{-h}^{-h_1} \left(A_1^{(\ell,2)} + \sum_{n=2}^{\infty} \left(-\gamma_{1,n} A_n^{(\ell,2)} e^{-\gamma_{1,n} x} + \gamma_{1,n} A_n^{(\ell,3)} e^{\gamma_{1,n} x} \right) V_n(\gamma_{1,n} z) \right) \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{1,l} \end{aligned} \quad \text{A(7)}$$

$$\begin{aligned} & \int_{-h}^{-h_1} \left\{ A_1^{(\ell,2)} + \sum_{n=2}^{\infty} \left(-\gamma_{1,n} A_n^{(\ell,2)} e^{-\gamma_{1,n} x} + \gamma_{1,n} A_n^{(\ell,3)} e^{\gamma_{1,n} x} \right) V_n(\gamma_{1,n} z) \right\} \\ & Z_m(\kappa_m z) dz = \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,4)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,5)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{1,r} \end{aligned} \quad \text{A(8)}$$

$$\begin{aligned} & \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,4)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,5)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} Z_m(\kappa_m z) dz \\ &= \int_{-h}^{-h_2} \left\{ A_1^{(\ell,6)} + \sum_{n=2}^{\infty} \left(-\gamma_{2,n} A_n^{(\ell,6)} e^{-\gamma_{2,n} x} + \gamma_{2,n} A_n^{(\ell,7)} e^{\gamma_{2,n} x} \right) V_n(\gamma_{2,n} z) \right\} \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{2,l} \end{aligned} \quad \text{A(9)}$$

$$\begin{aligned} & \int_{-h}^{-h_2} \left\{ A_1^{(\ell,6)} + \sum_{n=2}^{\infty} \left(-\gamma_{2,n} A_n^{(\ell,6)} e^{-\gamma_{2,n} x} + \gamma_{2,n} A_n^{(\ell,7)} e^{\gamma_{2,n} x} \right) V_n(\gamma_{2,n} z) \right\} \\ & Z_m(\kappa_m z) dz = \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,8)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,9)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{2,r} \end{aligned} \quad \text{A(10)}$$

$$\begin{aligned} & \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,8)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,9)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} Z_m(\kappa_m z) dz \\ &= \int_{-h}^{-h_3} \left\{ A_1^{(\ell,10)} + \sum_{n=2}^{\infty} \left(-\gamma_{3,n} A_n^{(\ell,10)} e^{-\gamma_{3,n} x} + \gamma_{3,n} A_n^{(\ell,11)} e^{\gamma_{3,n} x} \right) V_n(\gamma_{3,n} z) \right\} \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{3,l} \end{aligned} \quad \text{A(11)}$$

$$\begin{aligned} & \int_{-h}^{-h_3} \left\{ A_1^{(\ell,10)} + \sum_{n=2}^{\infty} \left(-\gamma_{3,n} A_n^{(\ell,10)} e^{-\gamma_{3,n} x} + \gamma_{3,n} A_n^{(\ell,11)} e^{\gamma_{3,n} x} \right) V_n(\gamma_{3,n} z) \right\} \\ & Z_m(\kappa_m z) dz = \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,12)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,13)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} \\ & Z_m(\kappa_m z) dz \quad \text{at } x = x_{3,r} \end{aligned} \quad \text{A(12)}$$

$$\begin{aligned} & \int_{-h}^0 \left\{ \sum_{n=1}^{\infty} \left(-\kappa_n A_n^{(\ell,12)} e^{-\kappa_n x} + \kappa_n A_n^{(\ell,13)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} Z_m(\kappa_m z) dz \\ &= \int_{-h}^{-T} \left\{ i\lambda_0 e^{i\lambda_0 x} A_0^{(\ell,14)} U_0(\lambda_0 z) - \lambda_n e^{-\sum_{n=2}^{-1} A_n^{(\ell,14)} U_n(\lambda_n z)} \right. \\ & \left. - \lambda_n e^{-\lambda_n x} \sum_{n=1}^{\infty} A_n^{(\ell,14)} U_n(\lambda_n z) \right\} Z_m(\kappa_m z) dz \quad \text{at } x = x_{4,l} \end{aligned} \quad \text{A(13)}$$

Similarly, together with the application of the pressure continuity conditions, we have:

$$\begin{aligned} & \int_{-h}^{-h_1} \left(Z_1(\kappa_1 z) e^{ikx} + \sum_{n=1}^{\infty} A_n^{(\ell,1)} e^{\kappa_n x} Z_n(\kappa_n z) \right) V_m(\gamma_{1,m} z) dz \\ &= \int_{-h}^{-h_1} \left\{ A_1^{(\ell,2)} x + A_1^{(\ell,3)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,2)} e^{-\gamma_{1,n} x} + A_n^{(\ell,3)} e^{\gamma_{1,n} x} \right) V_n(\gamma_{1,n} z) \right\} \\ & V_m(\gamma_{1,m} z) dz \quad \text{at } x = x_{1,l} \end{aligned} \quad \text{A(14)}$$

$$\begin{aligned} & \int_{-h}^{-h_1} \left\{ A_1^{(\ell,2)} x + A_1^{(\ell,3)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,2)} e^{-\gamma_{1,n} x} + A_n^{(\ell,3)} e^{\gamma_{1,n} x} \right) V_n(\gamma_{1,n} z) \right\} \\ & V_m(\gamma_{1,m} z) dz = \int_{-h}^{-h_1} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,4)} e^{-\kappa_n x} + A_n^{(\ell,5)} e^{\kappa_n x} \right) Z_n(\kappa_n z) + \frac{\delta_{\ell,2}}{\rho g A} \right\} \\ & V_m(\gamma_{1,m} z) dz \quad \text{at } x = x_{1,r} \end{aligned} \quad \text{A(15)}$$

$$\begin{aligned} & \int_{-h}^{-h_2} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,4)} e^{-\kappa_n x} + A_n^{(\ell,5)} e^{\kappa_n x} \right) Z_n(\kappa_n z) + \frac{\delta_{\ell,2}}{\rho g A} \right\} V_m(\gamma_{2,m} z) dz \\ &= \int_{-h}^{-h_2} \left\{ A_1^{(\ell,6)} x + A_1^{(\ell,7)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,6)} e^{-\gamma_{2,n} x} + A_n^{(\ell,7)} e^{\gamma_{2,n} x} \right) V_n(\gamma_{2,n} z) \right\} \\ & V_m(\gamma_{2,m} z) dz \quad \text{at } x = x_{2,l} \end{aligned} \quad \text{A(16)}$$

$$\begin{aligned} & \int_{-h}^{-h_2} \left\{ A_1^{(\ell,6)} x + A_1^{(\ell,7)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,6)} e^{-\gamma_{2,n} x} + A_n^{(\ell,7)} e^{\gamma_{2,n} x} \right) V_n(\gamma_{2,n} z) \right\} \\ & V_m(\gamma_{2,m} z) dz = \int_{-h}^{-h_2} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,8)} e^{-\kappa_n x} + A_n^{(\ell,9)} e^{\kappa_n x} \right) Z_n(\kappa_n z) + \frac{\delta_{\ell,2}}{\rho g A} \right\} \\ & V_m(\gamma_{2,m} z) dz \quad \text{at } x = x_{2,r} \end{aligned} \quad \text{A(17)}$$

$$\int_{-h}^{-h_3} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,8)} e^{-\kappa_n x} + A_n^{(\ell,9)} e^{\kappa_n x} \right) Z_n(\kappa_n z) + \frac{\delta_{\ell,2}}{\rho g A} \right\} V_m(\gamma_{3,m} z) dz$$

$$= \int_{-h}^{-h_3} \left\{ A_1^{(\ell,10)} x + A_1^{(\ell,11)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,10)} e^{-\gamma_{3,n} x} + A_n^{(\ell,11)} e^{\gamma_{3,n} x} \right) V_n(\gamma_{3,n} z) \right\}$$

$$V_m(\gamma_{3,m} z) dz \text{ at } x = x_{3,l}$$
A(18)

$$\int_{-h}^{-h_3} \left\{ A_1^{(\ell,10)} x + A_1^{(\ell,11)} + \sum_{n=2}^{\infty} \left(A_n^{(\ell,10)} e^{-\gamma_{3,n} x} + A_n^{(\ell,11)} e^{\gamma_{3,n} x} \right) V_n(\gamma_{3,n} z) \right\}$$

$$V_m(\gamma_{3,m} z) dz = \int_{-h}^{-h_3} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,12)} e^{-\kappa_n x} + A_n^{(\ell,13)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\}$$

$$V_m(\gamma_{3,m} z) dz \text{ at } x = x_{3,r}$$
A(19)

$$\int_{-h}^{-T} \left\{ \sum_{n=1}^{\infty} \left(A_n^{(\ell,12)} e^{-\kappa_n x} + A_n^{(\ell,13)} e^{\kappa_n x} \right) Z_n(\kappa_n z) \right\} U_m(\lambda_m z) dz$$

$$= \int_{-h}^{-T} \left\{ \left(A_0^{(\ell,14)} e^{i\lambda_0 x} \right) U_0(\lambda_0 z) + \sum_{n=2}^{-1} \left(A_n^{(\ell,14)} e^{-\lambda_n x} \right) U_n(\lambda_n z) \right.$$

$$\left. + \sum_{n=1}^{\infty} \left(A_n^{(\ell,14)} e^{-\lambda_n x} \right) U_n(\lambda_n z) \right\} U_m(\lambda_m z) dz \text{ at } x = x_{4,l}$$
A(20)

In general, we truncate n and m in equations A(7)-A(20) after M . Special attention is required to truncate m after $M-2$ in the equation of A(20), combined with the free edge. We obtain and solve a system of $14M+2$ linear equations with $14M+2$ unknown coefficients.

We also use the same way to determine the velocity potentials for the cases of the VLFS with the simply supported edge and the built-in edge.

Funding The Key Program for International Scientific and Technological Innovation Cooperation between Governments (Grant No. 2019YFE0102500), National Natural Science Foundation of China (Grant No. 52001086), and China Postdoctoral Science Foundation Funded Project (Grant No. 2019M661257).

Competing interest The authors have no competing interests to declare that are relevant to the content of this article.

References

- Arena F, Romolo A, Malara G, Ascanelli A (2013) On design and building of a U-OWC wave energy converter in the Mediterranean Sea: A case study. ASME 2013 32nd International Conference on Ocean, Offshore and Arctic Engineering. <https://doi.org/10.1115/OMAE2013-11593>
- Buck BH, Troell MF, Gesche K, Angel DL, Britta G, Thierry C (2018) State of the Art and Challenges for Offshore Integrated Multi-Trophic Aquaculture (IMTA). *Frontiers in Marine Science*, 5, 165. <https://doi.org/10.3389/fmars.2018.00165>

- Cheng Y, Ji C, Zhai G, Oleg G (2016) Dual inclined perforated anti-motion plates for mitigating hydroelastic response of a VLFS under wave action. *Ocean Engineering*, 121: 572-591. <https://doi.org/10.1016/j.oceaneng.2016.05.044>
- Cheng Y, Xi C, Dai S, Ji C, Collu M, Li M, Yuan Z, Incecik A (2022) Wave energy extraction and hydroelastic response reduction of modular floating breakwaters as array wave energy converters integrated into a very large floating structure. *Applied Energy*, 306: 117953. <https://doi.org/10.1016/j.apenergy.2021.117953>
- Chu YI, Wang CM, Park JC, Lader PF (2020) Review of cage and containment tank designs for offshore fish farming. *Aquaculture*, 519: 734928. <https://doi.org/10.1016/j.aquaculture.2020.734928>
- Crema I, Simonetti I, Cappiotti L, Oumeraci H (2015) Laboratory experiments on oscillating water column wave energy converters integrated in a very large floating structure. 11th European Wave and Tidal Energy Conference, EWTEC 2015
- Doyle S, Aggidis GA (2019) Development of multi-oscillating water columns as wave energy converters. *Renewable and Sustainable Energy Reviews*, 107: 75-86. <https://doi.org/10.1016/j.rser.2019.02.021>
- Evans DV, Davies TV (1968) Wave-Ice Interaction. Davidson Laboratory, Stevens Institute of Technology, Hoboken
- Evans DV, Porter R (1995) Hydrodynamic characteristics of an oscillating water column device. *Applied Ocean Research*, 17(3): 155-164. [https://doi.org/10.1016/0141-1187\(95\)00008-9](https://doi.org/10.1016/0141-1187(95)00008-9)
- Falcão AFO, Henriques JCC (2016) Oscillating-water-column wave energy converters and air turbines: A review. *Renewable Energy*, 85: 1391-1424. <https://doi.org/10.1016/j.renene.2015.07.086>
- Fox C, Squire VA (1990) Reflection and transmission characteristics at the edge of shore fast sea ice. *Journal of Geophysical Research*, 95(7): 11629-11639. <https://doi.org/10.1029/JC095iC07p11629>
- Gang A, Guo B, Hu Z, Hu R (2022) Performance analysis of a coast-OWC wave energy converter integrated system. *Applied Energy*, 311, 118605. <https://doi.org/10.1016/j.apenergy.2022.118605>
- Garnaud X, Mei CC (2009) Bragg scattering and wave-power extraction by an array of small buoys. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 466 (2113): 79-106. <https://doi.org/10.1098/rspa.2009.0458>
- Greenhill AG (1886) Wave motion in hydrodynamics. *American Journal of Mathematics*, 9(1): 62-96. <https://doi.org/10.2307/2369499>
- Guo YX, Liu Y, Meng X (2016) Oblique wave scattering by a semi-infinite elastic plate with finite draft floating on a step topography. *Acta Oceanologica Sinica*, 35(7): 113-121. <https://doi.org/10.1007/s13131-015-0760-2>
- Haskind MD (1957) The exciting forces and wetting of ships in waves. *Izvestia Akademii Nauk SSSR Otdelenie Tekhnicheskikh Nauk*, (7): 65-79
- He F, Zhang HS, Zhao JJ, Zheng SM, Iglesias G (2019) Hydrodynamic performance of a pile-supported OWC breakwater: An analytical study. *Applied Ocean Research*, 88: 326-340. <https://doi.org/10.1016/j.apor.2019.03.022>
- Hong DC, Hong SY (2007) Hydroelastic responses and drift forces of a very-long floating structure equipped with a pin-connected oscillating-water-column breakwater system. *Ocean Engineering*, 34(5-6): 696-708. <https://doi.org/10.1016/j.oceaneng.2006.05.004>
- Hong DC, Hong SY, Hong SW (2006) Reduction of hydroelastic responses of a very-long floating structure by a floating oscillating-water-column breakwater system. *Ocean Engineering*, 33(5-6): 610-634. <https://doi.org/10.1016/j.oceaneng.2005.06.005>
- Ikoma T, Furuya S, Aida Y, Masuda K, Eto H (2020) Characteristics of OWC type WEC dampers installed on a very large floating structure. ASME 2020 39th International Conference on Ocean, Offshore and Arctic Engineering. <https://doi.org/10.1115/omae2020->

- 19002
- Ikoma T, Maeda H, Masuda K, Rheem CK, Arita M (2002) Effects of submerged vertical plates and air chamber units in hydroelastic response reductions. 12th International Offshore and Polar Engineering Conference, Kitakyushu, Japan
- Ikoma T, Masuda K, Rheem CK, Maeda H, Watanabe Y (2012) Primary conversion efficiency of OWC type WECs installed on a large floating structure. ASME 2012 31st International Conference on Ocean, Offshore and Arctic Engineering, Rio de Janeiro, Brazil. <https://doi.org/10.1115/omae2012-83337>
- Ikoma T, Masuda K, Watanabe Y, Eto H, Kinoshita T (2015) Power Generation Potential of a VLFS Equipped with OWC Type WECs and Damper Effects on Elastic Motion. ASME 2015 34th International Conference on Ocean, Offshore and Arctic Engineering. <https://doi.org/10.1115/omae2015-41960>
- Ikoma T, Yuka W, Eto H, Masuda K, Omura K (2018) PTO and elastic motion of VLFSs installed with OWC type WECs. OCEANS - MTS/IEEE Kobe Techno-Oceans, Kobe, Japan. <https://doi.org/10.1109/oceanskobe.2018.8559273>
- John Ashlin S, Sannasiraj SA, Sundar V (2018) Performance of an array of oscillating water column devices integrated with an offshore detached breakwater. *Ocean Engineering*, 163: 518-532. <https://doi.org/10.1016/j.oceaneng.2018.05.043>
- Kim JW, Ertekin RC (1998) An eigenfunction-expansion method for predicting hydroelastic behavior of a shallow-draft VLFS. Proceedings of the 2nd International Conference on Hydroelasticity in Marine Technology, Kyushu University, Fukuoka, Japan
- Kyoung JH, Hong SY (2008) Localized finite element method on hydroelastic responses of OWC-Embedded VLFS. ASME 2008 27th International Conference on Offshore Mechanics and Arctic Engineering. <https://doi.org/10.1115/omae2008-57995>
- Li CH, Wang YX, Qiu DH (1999) The deformation of wave travelling into water covered by ice. *China Offshore Platform*, (2): 10-14
- Liu XD, Hirayama K, Sakai S (1994) Third order solution wave motion under ice sheet. *Marine Offshore & Ice Technology*, 383-392. <https://doi.org/10.2495/CMO940381>
- Maeda H, Onishi Y, Rheem CK, Ikoma T, Washio Y, Osawa H, Arita M (2000) Flexible response reduction on a very large floating structure due to OWC wave power devices. *Journal of the Japan Society of Naval Architects & Ocean Engineers*, 188(188): 279-285. https://doi.org/10.2534/JJASNAOE1968.2000.188_279
- Maeda H, Rheem CK, Ikoma T, Masuda K, Fujita N (2001) An experimental study on hydroelastic responses of elastic floating bodies with air chambers in irregular waves. *Journal of the Japan Society of Naval Architects & Ocean Engineers*, 2001(190): 387-393. https://doi.org/10.2534/jjasnaoe1968.2001.190_387
- Mohapatra SC, Guedes Soares C (2019) Interaction of ocean waves with floating and submerged horizontal flexible structures in three-dimensions. *Applied Ocean Research*, 83: 136-154. <https://doi.org/10.1016/j.apor.2018.10.009>
- Ning D, Wang R, Chen L, Sun K (2019) Experimental investigation of a land-based dual-chamber OWC wave energy converter. *Renewable and Sustainable Energy Reviews*, 105: 48-60. <https://doi.org/10.1016/j.rser.2019.01.043>
- Ning D, Zhao X, Zhao M, Hann M, Kang H (2017) Analytical investigation of hydrodynamic performance of a dual pontoon WEC-type breakwater. *Applied Ocean Research*, 65: 102-111. <https://doi.org/10.1016/j.apor.2017.03.012>
- Ohta K (1999) Effect of attachment of a horizontal/vertical plate on the wave response of a VLFS. Proceedings of the Third International Workshop on Very Large Floating Structure, University of Hawaii at Manoa Honolulu
- Rezanejad K, Gadelho JFM, Xu S, Guedes Soares C (2021) Experimental investigation on the hydrodynamic performance of a new type floating oscillating water column device with dual-chambers. *Ocean Engineering*, 234: 109307. <https://doi.org/10.1016/j.oceaneng.2021.109307>
- Sahoo T, Yip TL, Chwang AT (2001) Scattering of surface waves by a semi-infinite floating elastic plate. *Physics of Fluids*, 13(11): 3215-3222. <https://doi.org/10.1063/1.1408294>
- Sarkar D, Renzi E, Dias F (2015) Effect of a straight coast on the hydrodynamics and performance of the oscillating wave surge converter. *Ocean Engineering*, 105: 25-32. <https://doi.org/10.1016/j.oceaneng.2015.05.025>
- Shalby M, Dorrell DG, Walker P (2019) Multi-chamber oscillating water column wave energy converters and air turbines: a review. *International Journal of Energy Research*, 43(2): 681-696. <https://doi.org/10.1002/er.4222>
- Simonetti I, Cappiotti L (2021) Hydraulic performance of oscillating water column structures as anti-reflection devices to reduce harbour agitation. *Coastal Engineering*, 165: 103837
- Squire VA (1995) Of ocean waves and sea ice. *Annual Review of Fluid Mechanics*, 27: 115-168. <https://doi.org/10.1146/annurev.fl.27.010195.000555>
- Squire VA (2007) Of ocean waves and sea-ice revisited. *Cold Regions Science and Technology*, 49(2): 110-133. <https://doi.org/10.1016/j.coldregions.2007.04.007>
- Suzuki H, Bhattacharya B, Fujikubo M, Hudson DA, Riggs HR, Seto H, Shin H, Shugar TA, Yasuzawa Y, Zong Z (2006) Very large floating structures. 16th International Ship and Offshore Structures Congress, Southampton, UK
- Teng B, Cheng L, Liu SX, Li FJ (2001) Modified eigenfunction expansion methods for interaction of water waves with a semi-infinite elastic plate. *Applied Ocean Research*, 6(23): 357-368. [https://doi.org/10.1016/S0141-1187\(02\)00005-6](https://doi.org/10.1016/S0141-1187(02)00005-6)
- Teng B, Gou Y, Cheng L, Liu SX (2006) Draft effect on wave action with a semi-infinite elastic plate. *Acta Oceanologica Sinica*, 25 (6). <https://doi.org/10.1016/j.marchem.2005.09.003>
- Torre-Enciso Y, Ortubia I, de Aguilera LIL, Marqués J (2009) Mutriku wave power plant: from the thinking out to the reality. Proceedings of the 8th European Wave and Tidal Energy Conference, Uppsala Sweden
- Wadhams P (1973) Attenuation of swell by sea ice. *Journal of Geophysical Research Atmospheres*, 78(18): 3552-3563. <https://doi.org/10.1029/JC078i018p03552>
- Wang C, Zhang YL (2021) Wave power extraction analysis on a dual-chamber oscillating water column device composed by two separated units: an analytical study. *Applied Ocean Research*, 111: 102634. <https://doi.org/10.1016/j.apor.2021.102634>
- Wang CM, Tay ZY, Takagi K, Utsunomiya T (2010) Literature review of methods for mitigating hydroelastic response of VLFS under wave action. *Applied Mechanics Reviews*, 63(3). <https://doi.org/10.1115/1.4001690>
- Wang CM, Wang BT (2015) *Large Floating Structures: Technological Advances*. Springer, Singapore. <https://doi.org/10.1016/j.marstruc.2011.02.007>
- Wang L (2018) *Theoretical Study on the Nested Oscillating Water Column Wave Energy Conversion Devices*. Zhejiang University, Zhejiang, China
- Wang LG, Xiong YS, Cai F (2007) A parabolic Newton method fitting for iterative finding complex roots. *Journal of Natural Science of Hunan Normal University*, 30(4): 11-14
- Watanabe E, Utsunomiya T, Kuramoto M, Ohta H, Torii T, Hayashi N (2003) Wave response analysis of VLFS with an attached

- submerged plate. *International Journal of Offshore and Polar Engineers*, 3(13): 190-197
- Wu J, Qin L, Chen N, Qian C, Zheng S (2022) Investigation on a spring-integrated mechanical power take-off system for wave energy conversion purpose. *Energy*, 245: 123318. <https://doi.org/10.1016/j.energy.2022.123318>
- Xu F, Lu DQ (2009) An optimization of eigenfunction expansion method for the interaction of water waves with an elastic plate. *Journal of Hydrodynamics*, 21(4): 526-530. [https://doi.org/10.1016/S1001-6058\(08\)60180-8](https://doi.org/10.1016/S1001-6058(08)60180-8)
- Young S, Kyoung JH (2007) Effects of location and shape of OWC-chamber on the hydroelastic response of VLFS. *Proceedings of the Sixteenth (2007) International Offshore and Polar Engineering Conference*, Lisbon, Portugal
- Zhang N, Zheng X, Ma Q (2019) Study on wave-induced kinematic responses and flexures of ice floe by smoothed particle hydrodynamics. *Computers & Fluids*, 189: 46-59. <https://doi.org/10.1016/j.compfluid.2019.04.020>
- Zhao X, Du X, Li M, Götteman M (2021) Semi-analytical study on the hydrodynamic performance of an interconnected floating breakwater-WEC system in presence of the seawall. *Applied Ocean Research*, 109: 102555. <https://doi.org/10.1016/j.apor.2021.102555>
- Zhao X, Zou Q, Geng J, Zhang Y, Wang Z (2022) Influences of wave resonance on hydrodynamic efficiency and loading of an OWC array under oblique waves. *Applied Ocean Research*, 120: 103069. <https://doi.org/10.1016/j.apor.2022.103069>
- Zheng SM, Antonini A, Zhang YL, Miles J, Greaves D, Zhu GX, Iglesias G (2020) Hydrodynamic performance of a multi-oscillating water column (OWC) platform. *Applied Ocean Research*, 99: 102168. <https://doi.org/10.1016/j.apor.2020.102168>